


variables/V-color

Micromotors | Coreless BLDC motors | SVTN A 01-1220-09-D-H



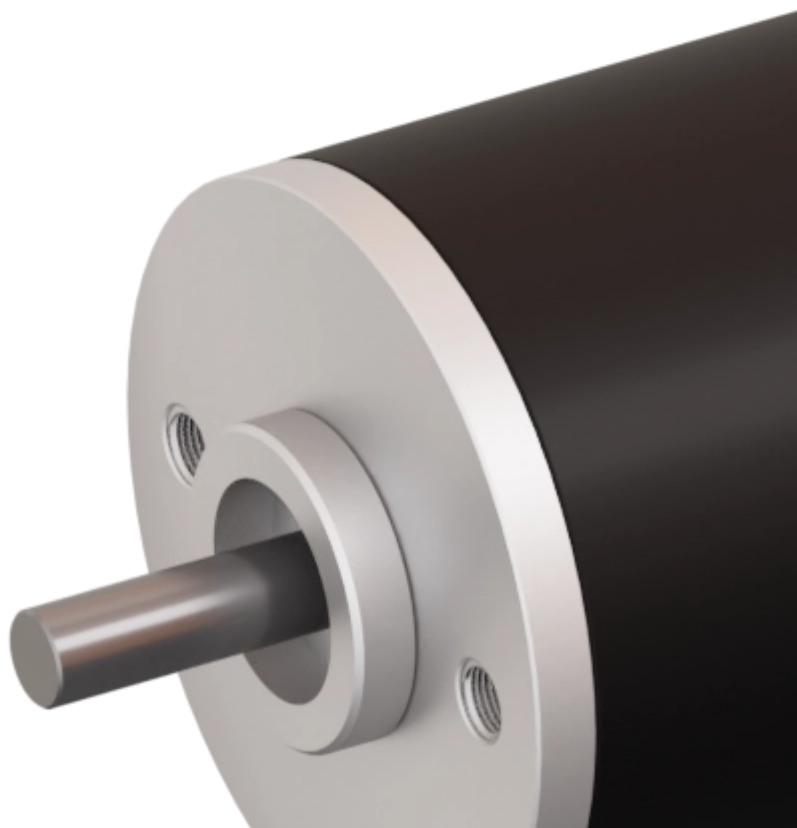

Feature

SVTN A 01-1220-09-D-H

| | |
|-----------------------------|-------------|
| Nominal voltage | 9 V |
| No load speed | 36890 rpm |
| No load current | 83 mA |
| Nominal speed | 29888 rpm |
| Nominal torque | 1.300 mNm |
| Nominal current | 0.660 A |
| Stall torque | 6.850 mNm |
| Stall current | 3.100 A |
| Max. efficiency | 69.970 % |
| Terminal resistance* | 2.900 ? |
| Terminal inductance* | 0.190 mH |
| Torque constant | 2.270 mNm/A |
| Speed constant | 4212 mNm/V |

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

2 Pole Brushless DC Motors

SVTN A 01-1220-09-D-H

| | |
|---------------------------------|-----------------|
| Speed/torque gradient | 5386.00 rpm/mNm |
| Mechanical time constant | 9.600 ms |

SVTN A 01-1220-09-D-H

Rotor inertia

0.170 gcm²

The benefits of this new technology are torque and high-speed when compared to the same sizing. The lack of cogging, a reduced ripple torque, a linear correlation between speed and torque, low inertia bring performance to a greater level in terms of power, dynamics by means of reduced weights and reduced dimensions. Servotecnica's brushless motors apply hall sensors as a standard option, in addition to having the magnetic encoder option. Thanks to the sensors it is possible to control rotation speed, and, thanks to the lack of cogging, provide high performance and accuracy.



Advantages

- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy



Benefits

- Light and compact, easy integration
- High reliability
- Good return on investment



pes

product
engineering
services

expertise in connectivity