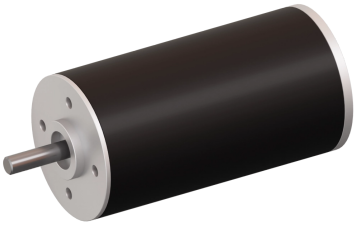

Coreless BLDC motor.

High Power Density - High Efficiency - Cost Effective
Low noise - Low inductance - Good Heat Dissipation
Long Lifetime - No Cogging - Low Inertia - Robust

Feature

	SVTN A 01-3660-36-D-H
Nominal voltage	36 V
No load speed	8014 rpm
No load current	101 mA
Nominal speed	6804 rpm
Nominal torque	82.000 mNm
Nominal current	2.030 A
Stall torque	543.000 mNm
Stall current	12.900 A
Max. efficiency	83.100 %
Terminal resistance*	2.800 Ω
Terminal inductance*	0.880 mH
Torque constant	42.560 mNm/A
Speed constant	224 mNm/V

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

2 POLE BRUSHLESS DC MOTORS

	SVTN A 01-3660-36-D-H
Speed/torque gradient	14.80 rpm/mNm
Mechanical time constant	3.000 ms
Rotor inertia	19.500 gcm²

The benefits of this new technology are torque and high-speed when compared to the same sizing. The lack of cogging, a reduced ripple torque, a linear correlation between speed and torque, low inertia bring performance to a greater level in terms of power, dynamics by means of reduced weights and reduced dimensions. Servotecnica's brushless motors apply hall sensors as a standard option, in addition to having the magnetic encoder option. Thanks to the sensors it is possible to control rotation speed, and, thanks to the lack of cogging, provide high performance and accuracy.

Advantages

- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy

Benefits

- Light and compact, easy integration
- High reliability
- Good return on investment