


variables/V-color

Micromotors | Flat Brushless DC Motors | SVTM F 03-84-24-D-WH



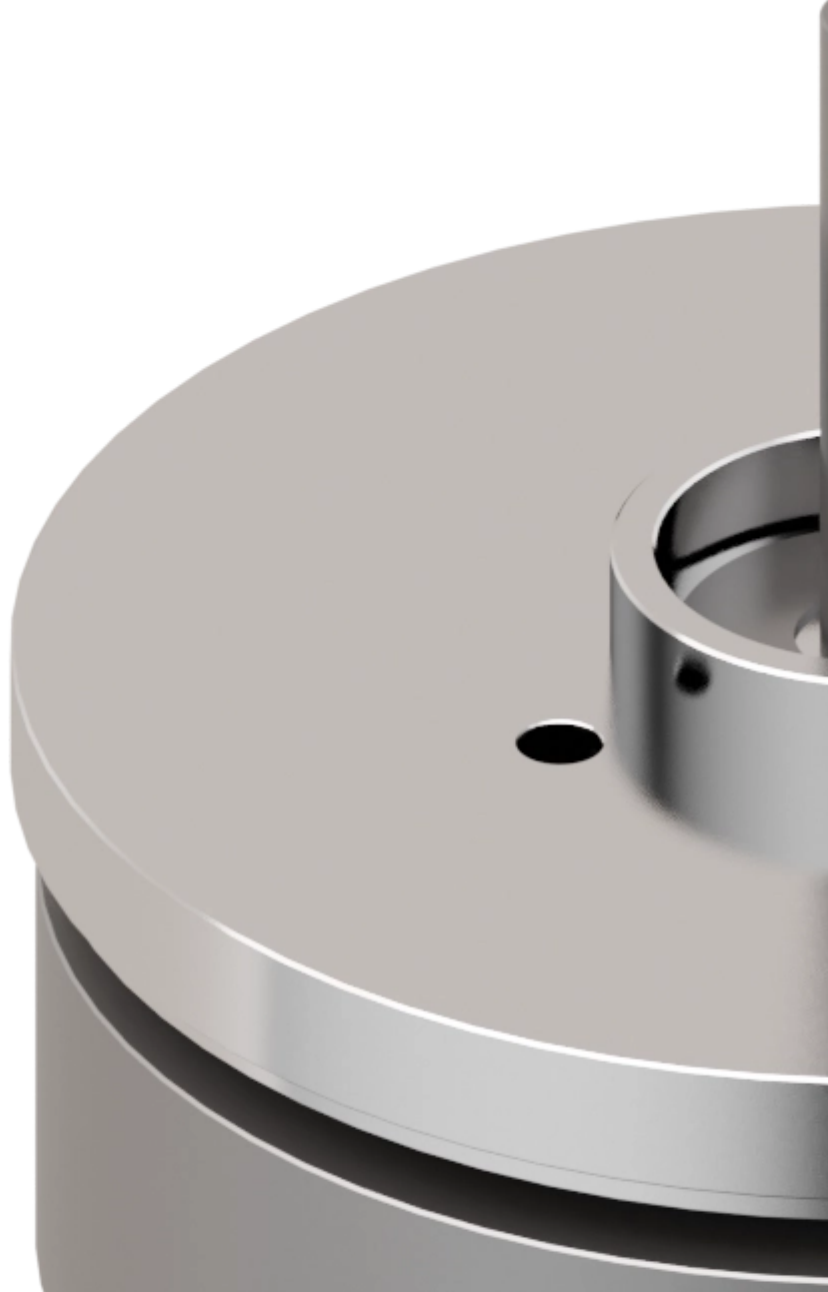

Feature

SVTM F 03-84-24-D-WH

| | |
|-----------------------------|--------------|
| Nominal voltage | 24 V |
| No load speed | 6700 rpm |
| No load current | 0 mA |
| Nominal speed | 5260 rpm |
| Nominal torque | 84.000 mNm |
| Nominal current | 2.460 A |
| Stall torque | 250.000 mNm |
| Stall current | 7.800 A |
| Terminal resistance* | 0.700 ? |
| Terminal inductance* | 0.330 mH |
| Torque constant | 34.200 mNm/A |

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

Brushless DC Compact Motor

SVTM F 03-84-24-D-WH

Rotor inertia 135.000 gcm²

The natural geometry of the outrunner Brushless Flat Motors, as well as the iron core winding, are the perfect fit for applications requiring high-torque in reduced dimensions. Simplified design, high-end material selection, and automated manufacturing make Flat Motors a high-

performance solution at a competitive price. Our vocation in listening to the client's requirements has led us to develop a customization-minded offer, focusing on specific application requirements such as integrated feedbacks, special cables, and custom shape of shafts and flanges.



Advantages

- Compact
- High Torque
- High-quality materials and automated manufacturing
- Highly customizable



Benefits

- Compact motor leads to compact design
- High Efficiency
- Good quality/price ratio
- Better and easier integration



pes

product
engineering
services

expertise in connectivity