


variables/V-color

Micromotors | Coreless DC Motors | SVTN B 01-1230-06-D-OM



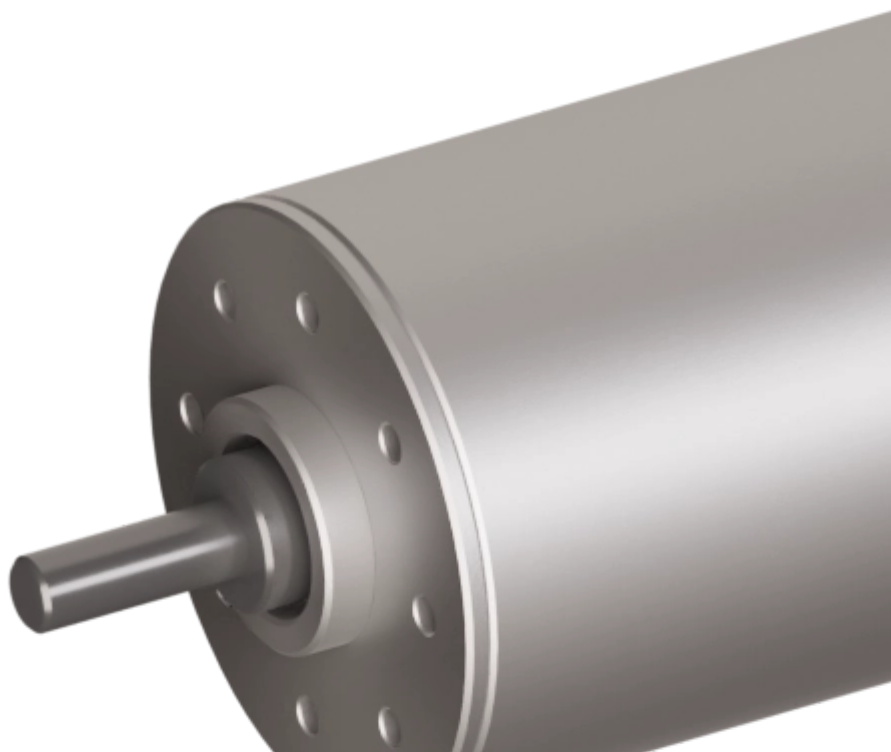

Feature

SVTN B 01-1230-06-D-OM

Nominal voltage	6 V
No load speed	13500 rpm
No load current	22 mA
Nominal speed	10800 rpm
Nominal torque	1.400 mNm
Nominal current	0.400 A
Stall torque	7.000 mNm
Stall current	1.690 A
Max. efficiency	78.500 %
Terminal resistance*	3.550 ?
Terminal inductance*	0.250 mH
Torque constant	4.190 mNm/A
Speed constant	2250 mNm/V

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

2 Pole Brushed DC Motors

SVTN B 01-1230-06-D-OM

Speed/torque gradient	1932.10 rpm/mNm
Mechanical time constant	5.700 ms

SVTN B 01-1230-06-D-OM

Rotor inertia

0.280 gcm²

The specific design construction of a coreless DC motor provides several advantages over the traditional, iron core, technology. A first added value it is given by rotor lower mass and inertia, so very rapid acceleration and deceleration rates are possible. Furthermore, the lack of iron reduces "iron losses" to provide higher efficiencies (up to 90 percent) than traditional DC motors. Last, but not least, the coreless design reduces winding inductance, so sparking between the brushes and commutator is reduced, increasing motor life and reducing electromagnetic interference (EMI). Our Coreless DC Motors are available on a wide range of sizes and we can show high flexibility on custom requirements.



Advantages

- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy



Benefits

- Light and compact, easy integration
- High reliability
- Good return on investment



p e s

product
engineering
services

expertise in connectivity