


variables/V-color

Magnetic Tool | E Series | ELAY50X5 Smart Tool

 **magswitch**

HW: ELAY50X5_ ##
SW: ELAY50X5_ ##
P/N: 81401320

Baud Rate: 250k8d
24V+/-5% DC 6.5A
Node ID:

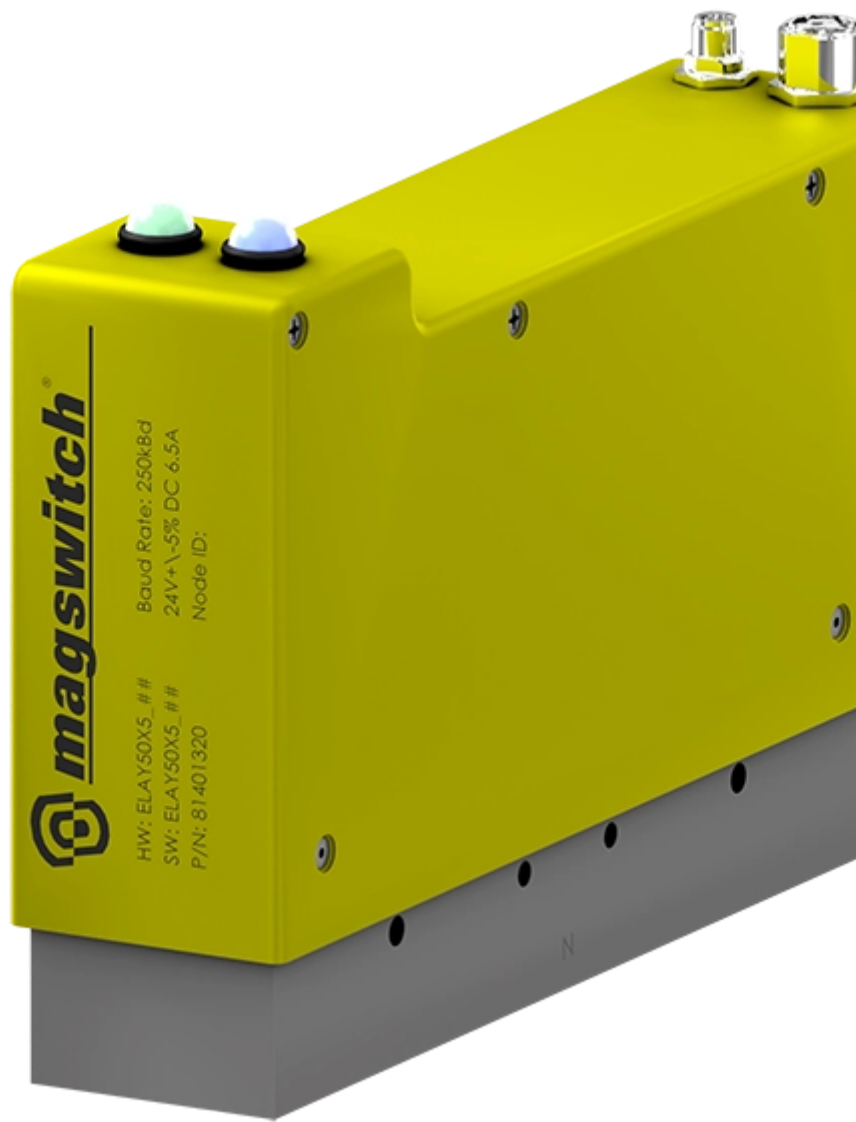



Feature

ELAY50X5 Smart Tool

Weight	15.40 kg
Max Breakaway ¹	1151.00 kg
Working Load ²	287.75 kg
Max shear	230.00 kg
Overall Height	227.62 mm
Magnetic pole footprint	148x71 mm

¹ Safety factor 2:1

² Safety factor 4:1

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

Electrical actuation, variable field output, integrated sensors

Finally, the electric actuation – the all NEW E Series! Combining Magswitch's patented core technology with revolutionary smart tool capabilities and an electric actuation, The all new Variable Field Output (VFO) allows the tool to de-stack thin material and optimize performance for your component. Once the part is gripped and separated from adjacent parts, the tool can be switched to full power for maximum performance.



Advantages

- Electrical actuation of PERMANENT magnets
- Fail safe when actuated at 100%
- Destack, bin pick target parts with different thickness or sizes with one single tool
- Control via CANOpen and power supply through a single M12 connector



Benefits

- Limited maintenance costs
- Limited peripheral equipment costs
- Very low power consumption
- Reduced cycle time
- Controlled integration costs



pes

product
engineering
services

expertise in connectivity