


variables/V-color

## **Micromotors | Coreless BLDC motors | SVTN A 01-1630-12-S-O**





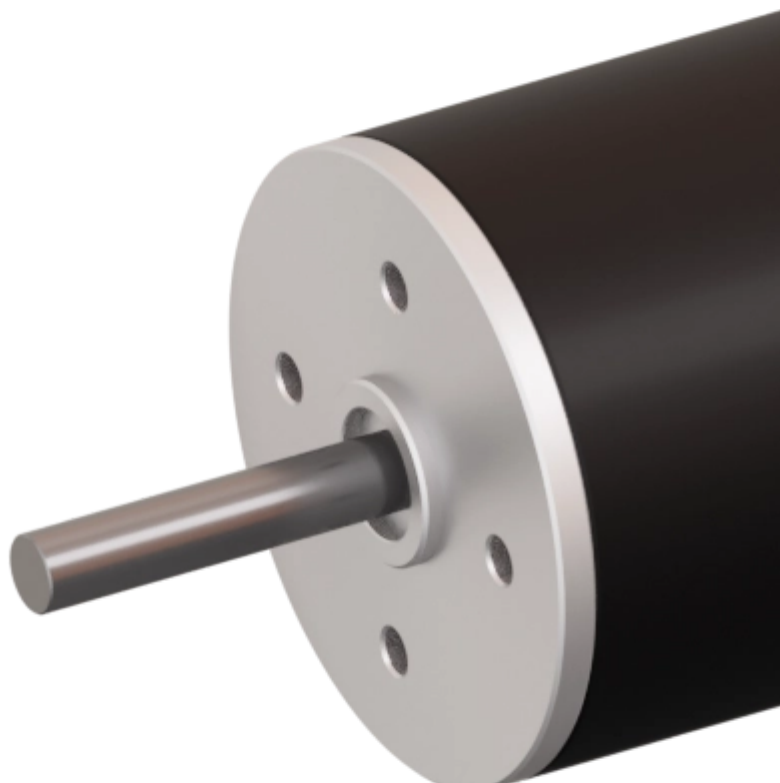

## Feature

### SVTN A 01-1630-12-S-O

<b>Nominal voltage</b>	12 V
<b>No load speed</b>	23220 rpm
<b>No load current</b>	210 mA
<b>Nominal speed</b>	19138 rpm
<b>Nominal torque</b>	3.500 mNm
<b>Nominal current</b>	0.950 A
<b>Stall torque</b>	20.000 mNm
<b>Stall current</b>	4.400 A
<b>Max. efficiency</b>	61.300 %
<b>Terminal resistance*</b>	2.700 ?
<b>Terminal inductance*</b>	0.080 mH
<b>Torque constant</b>	4.700 mNm/A
<b>Speed constant</b>	2031 mNm/V

**Notice :** The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

## 2 Pole Brushless DC Motors

### SVTN A 01-1630-12-S-O

<b>Speed/torque gradient</b>	1166.30 rpm/mNm
<b>Mechanical time constant</b>	5.800 ms

## SVTN A 01-1630-12-S-O

### Rotor inertia

0.480 gcm<sup>2</sup>

The benefits of this new technology are torque and high-speed when compared to the same sizing. The lack of cogging, a reduced ripple torque, a linear correlation between speed and torque, low inertia bring performance to a greater level in terms of power, dynamics by means of reduced weights and reduced dimensions. Servotecnica's brushless motors apply hall sensors as a standard option, in addition to having the magnetic encoder option. Thanks to the sensors it is possible to control rotation speed, and, thanks to the lack of cogging, provide high performance and accuracy.



#### Advantages

- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy



#### Benefits

- Light and compact, easy integration
- High reliability
- Good return on investment



**pes**

product  
engineering  
services

**expertise in connectivity**